

**BUDGET AMENDMENT REQUEST 2018-04
MOLOKAI AKAU STREET DRAINLINE REPLACEMENT**


**PROPOSED INCREASE: \$350,000 (\$290,000 IF PACKAGED)
DISTRICT: WAILUKU-KAHULUI**

Scope of Work:

- Replacement of 700 feet of 18-inch to 30-inch diameter drainline at Molokai Akau Street, from Onehee Avenue to Pohaku Street.
- Adjustments to other utilities
- Reconstruction of affected driveways and sidewalk

Project Justification:

The drainage system is 50 years old and the existing corrugated metal pipes have deteriorated to the point where voids at the bottom have formed. Sinkholes occurred at this location in June 2015 and January 2017. Continued delay of this project will lead to worsened conditions and additional sinkhole occurrences. The project must be completed to ensure adequate drainage infrastructure and a safe roadway is provided at this subdivision.

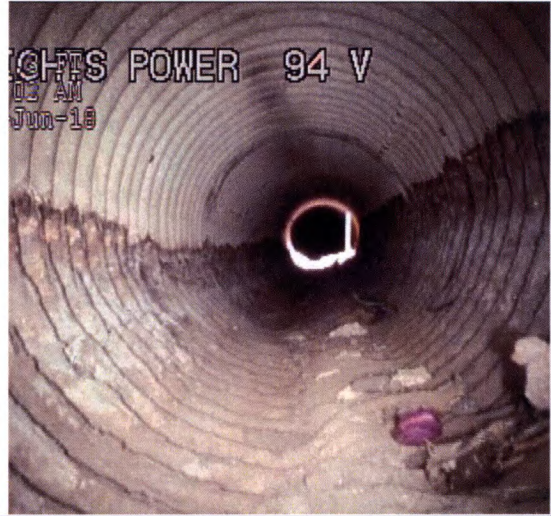

**BUDGET AMENDMENT REQUEST 2018-05
ALAMAHA STREET DRAINLINE REPLACEMENT AT WAKEA AVENUE**

**PROPOSED INCREASE: \$520,000 (\$490,000 IF PACKAGED)
DISTRICT: WAILUKU-KAHULUI**

Scope of Work:

- Replacement of 360 feet of 18-inch to 30-inch diameter drainline at the Kahului Industrial Subdivision.
- Requires dewatering the site
- Repair of existing sidewalks

Project Justification:

The drainage system is 40 years old and the existing corrugated metal pipes have deteriorated to the point where voids at the bottom have formed. Sinkholes occurred at this location in July 2016 and September 2017. Continued delay of this project will lead to worsened conditions and additional sinkhole occurrences. The project must be completed to ensure adequate drainage infrastructure and a safe roadway is provided at this high-traffic commercial area.



**BUDGET AMENDMENT REQUEST 2018-06
POHAKU STREET DRAINLINE REPLACEMENT**

**PROPOSED INCREASE: \$1,500,000 (\$1,420,000 IF PACKAGED)
DISTRICT: WAILUKU-KAHULUI**

Scope of Work:

- Replacement of 2,300 feet of 18-inch to 54-inch drainline at Pohaku Street.
- Adjustments to other utilities
- Resurfacing the affected lane at Pohaku Street
- Reconstruction of speed humps

Project Justification:

The drainage system is 50 years old and the existing corrugated metal pipes have deteriorated to the point where voids at the bottom have formed. Sinkholes occurred at this location several times in the past decade. Continued delay of this project will lead to worsened conditions and additional sinkhole occurrences. The project must be completed to ensure adequate drainage infrastructure and a safe roadway is provided at this subdivision.

